

# SHINDENGEN

## General Purpose Rectifiers

SIL Bridges


# U8KBA80R

**800V 8A**

### APPLICATION

- Monitor
- TV
- Audio equipment
- Printer
- SMPS
- Adapter for notebook PC
- Power supply for desktop PC

### OUTLINE DIMENSIONS

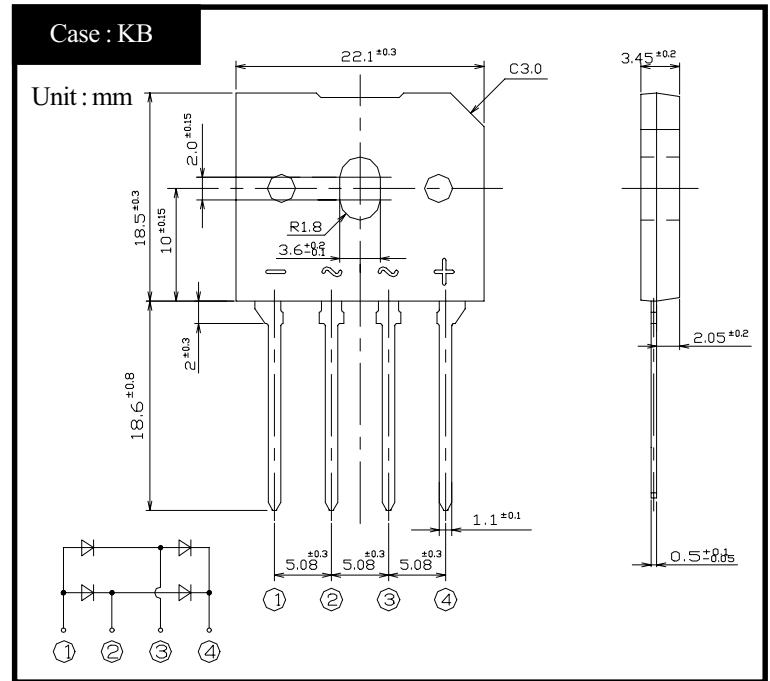

### RATINGS

Absolute Maximum Ratings (If not specified, T<sub>c</sub>=25°C)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T <sub>stg</sub>		-55 to 150	°C
Operating Junction Temperature	T <sub>j</sub>		150	°C
Maximum Reverse Voltage	V <sub>RM</sub>		800	V
Average Rectified Forward Current	I <sub>O</sub>	50Hz sine wave, R-load, On glass-epoxy substrate Ta=26°C	3.4	A
		50Hz sine wave, R-load, With heatsink T <sub>c</sub> =82°C	8	
Peak Surge Forward Current	I <sub>FSM</sub>	60Hz sine wave, Non-repetitive 1cycle peak value, Rating of per diode, T <sub>j</sub> = 25°C	200	A
Current Squared Time	I <sup>2</sup> t	1ms ≤ t < 10ms T <sub>j</sub> =25°C, Rating of per diode	110	A <sup>2</sup> s
Dielectric Strength	V <sub>dis</sub>	Terminals to case, AC 1 minute	2.0	kV
Mounting Torque	TOR	(Recommended torque: 0.5N·m)	0.8	N·m


Electrical Characteristics (If not specified, T<sub>c</sub>=25°C)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =8A, Pulse measurement, Rating of per diode	Max 1.0	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =800V, Pulse measurement, Rating of per diode	Max 10	μA
Thermal Resistance	θ <sub>jl</sub>	junction to lead, On glass-epoxy substrate	Max 4.2	°C/W
	θ <sub>ja</sub>	junction to ambient, On glass-epoxy substrate	Max 23	
	θ <sub>jc</sub>	junction to case	Max 5.0	

# U8KBA80R


# Forward Voltage

Pulse measurement per diode

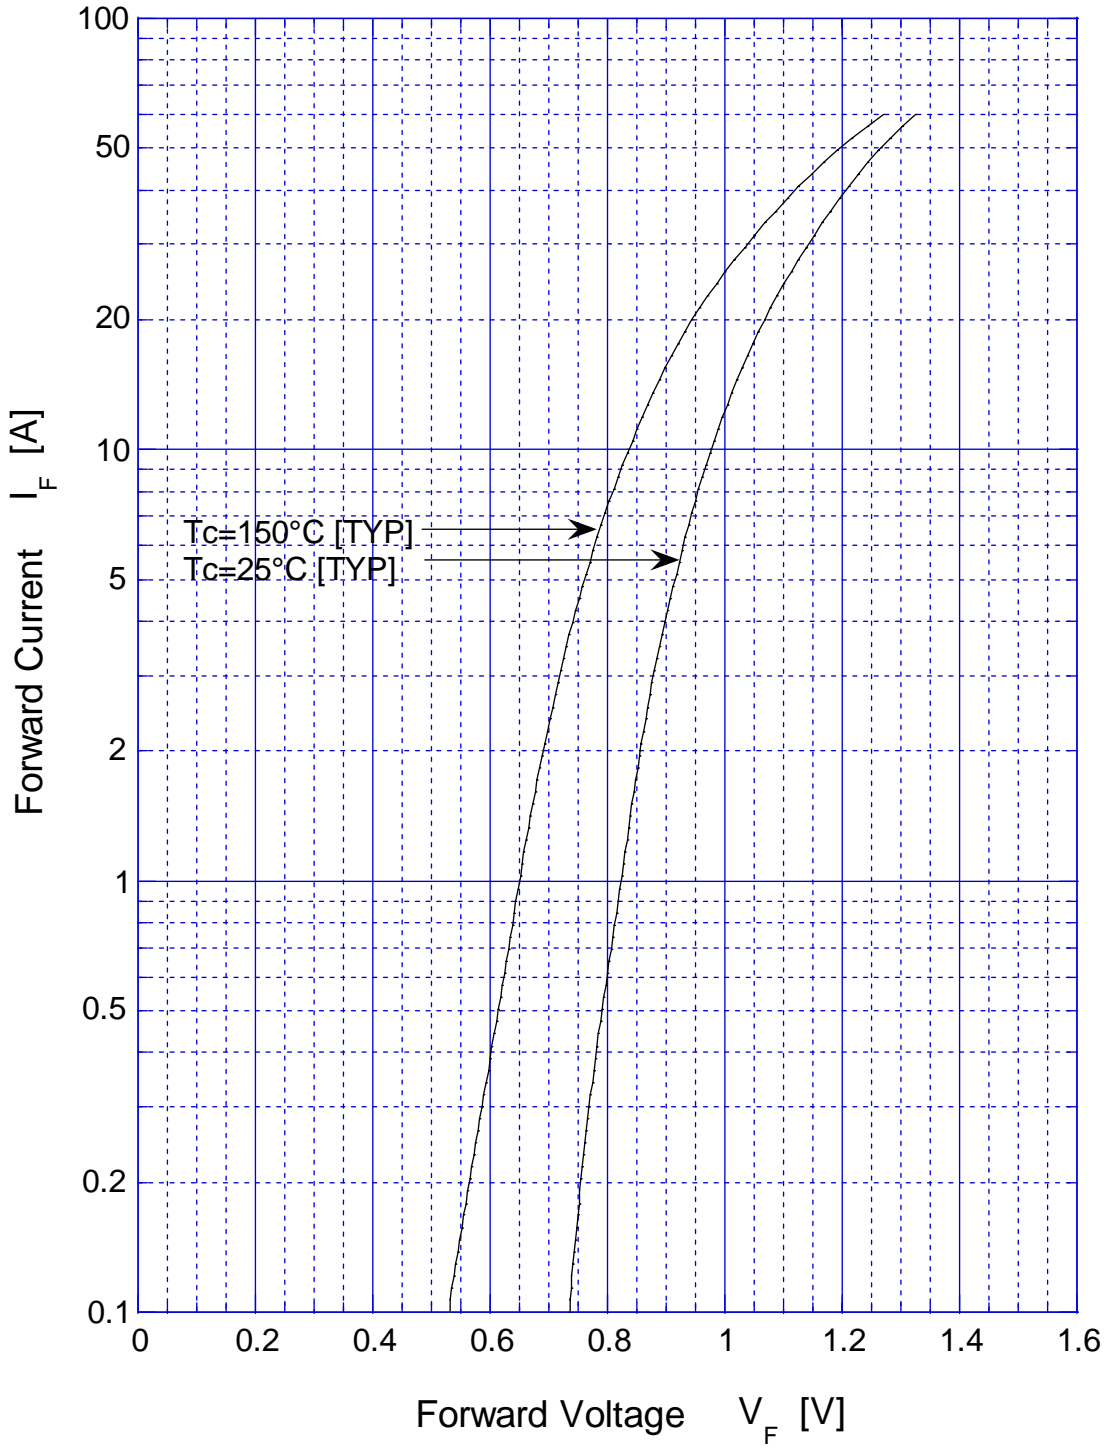

# U8KBA80R Forward Power Dissipation

---

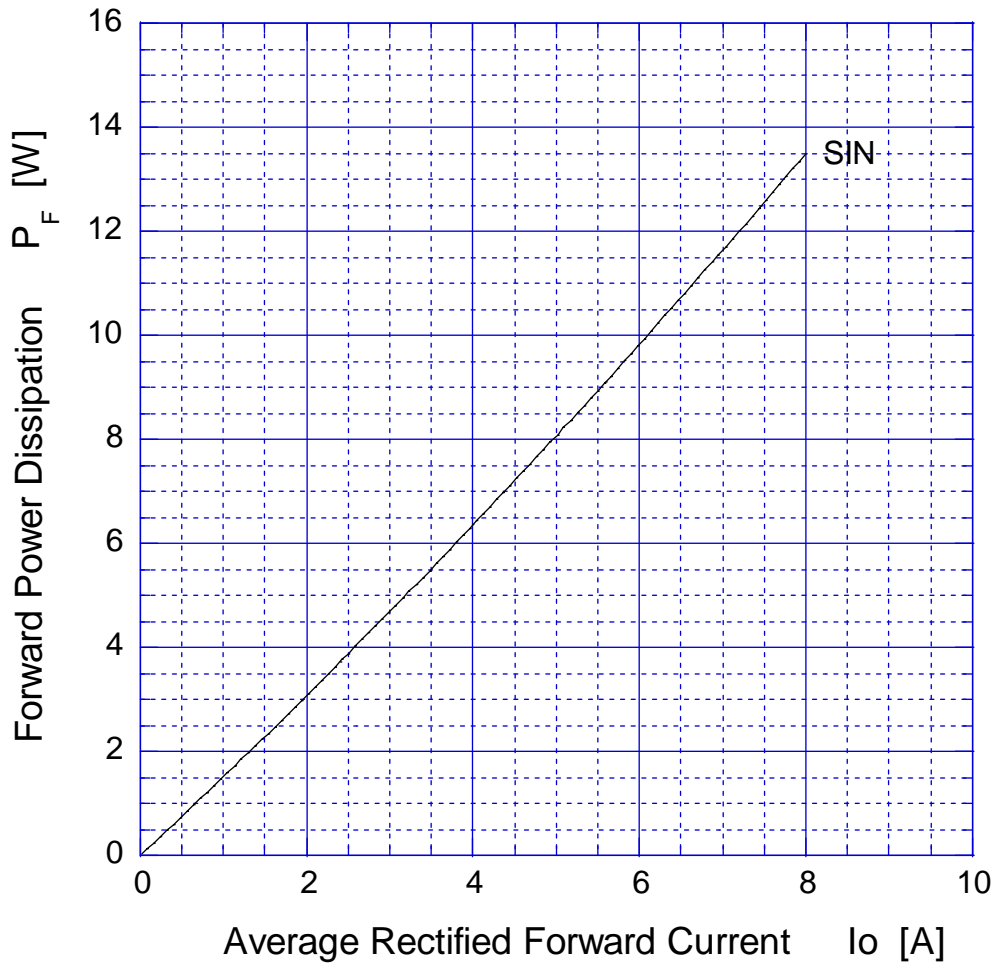


$T_j = 150^\circ\text{C}$

# U8KBA80R


# Derating Curve

Conductor Area 172.6cm<sup>2</sup>

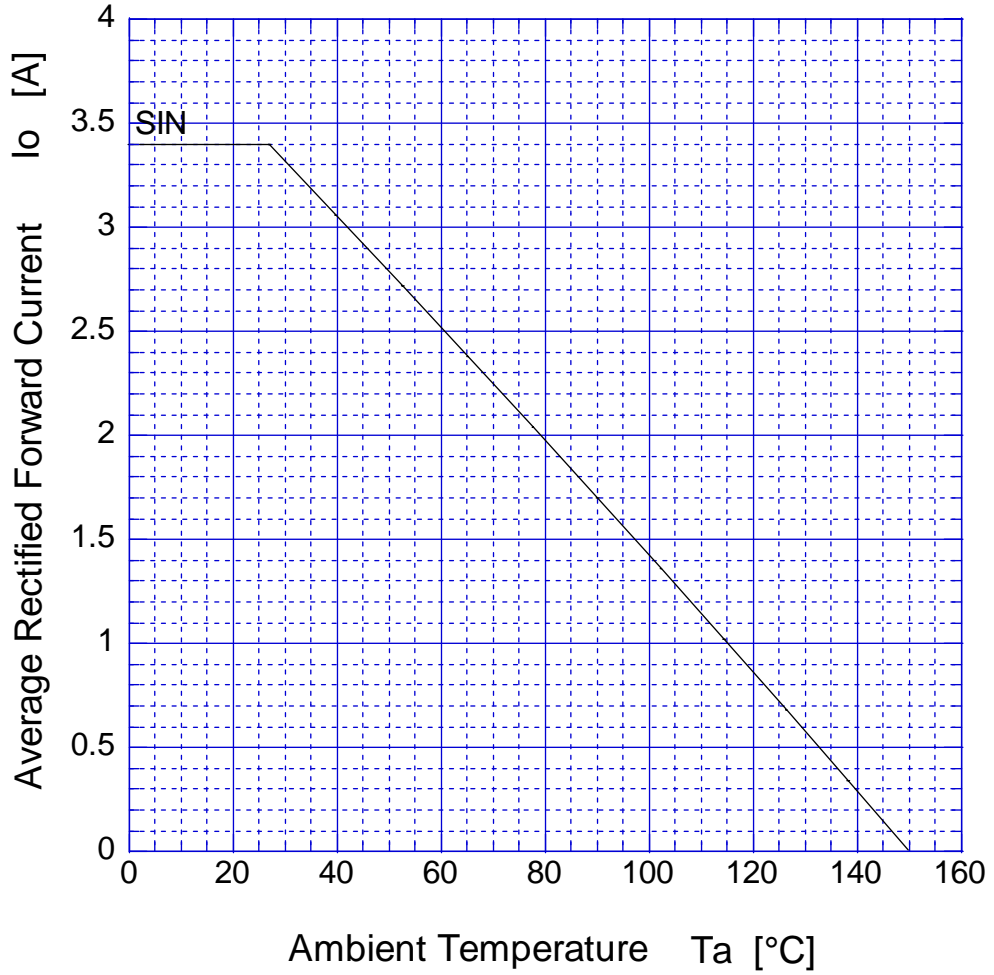


# U8KBA80R

# Derating Curve

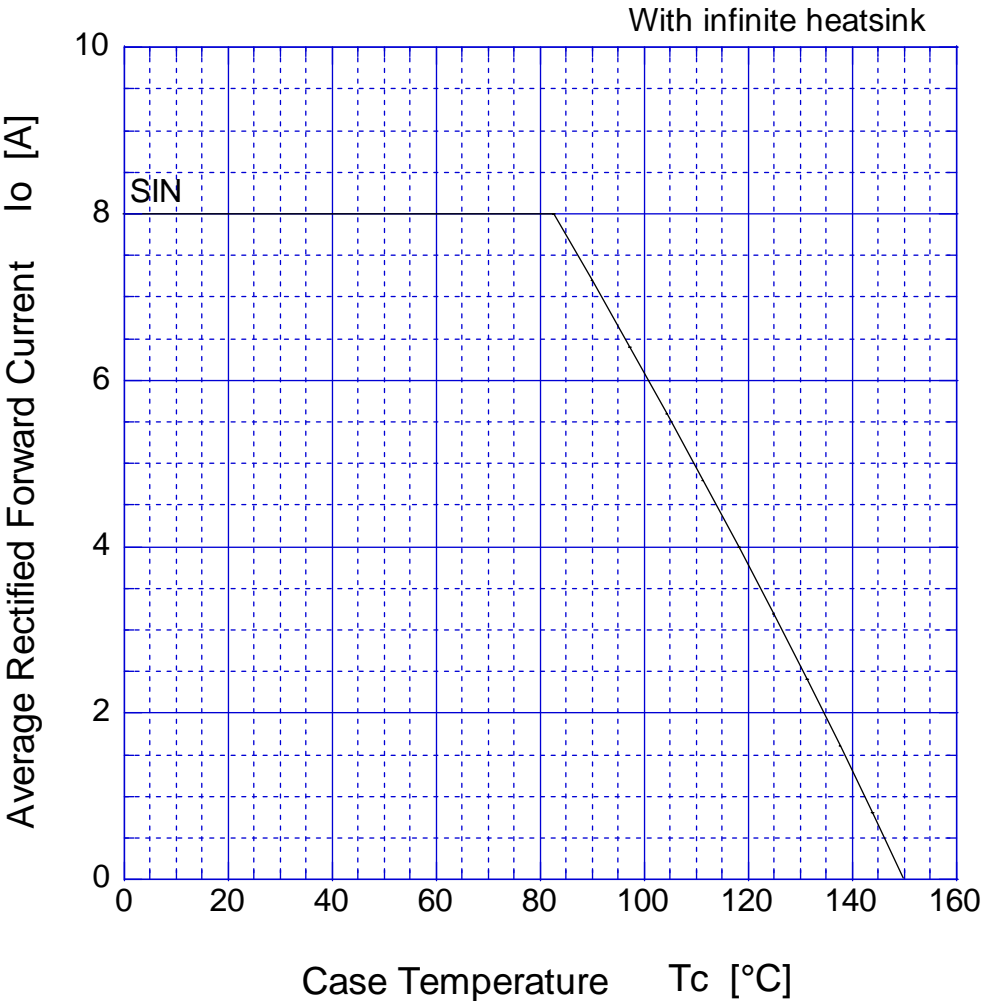

# U8KBA80R Peak Surge Forward Capability

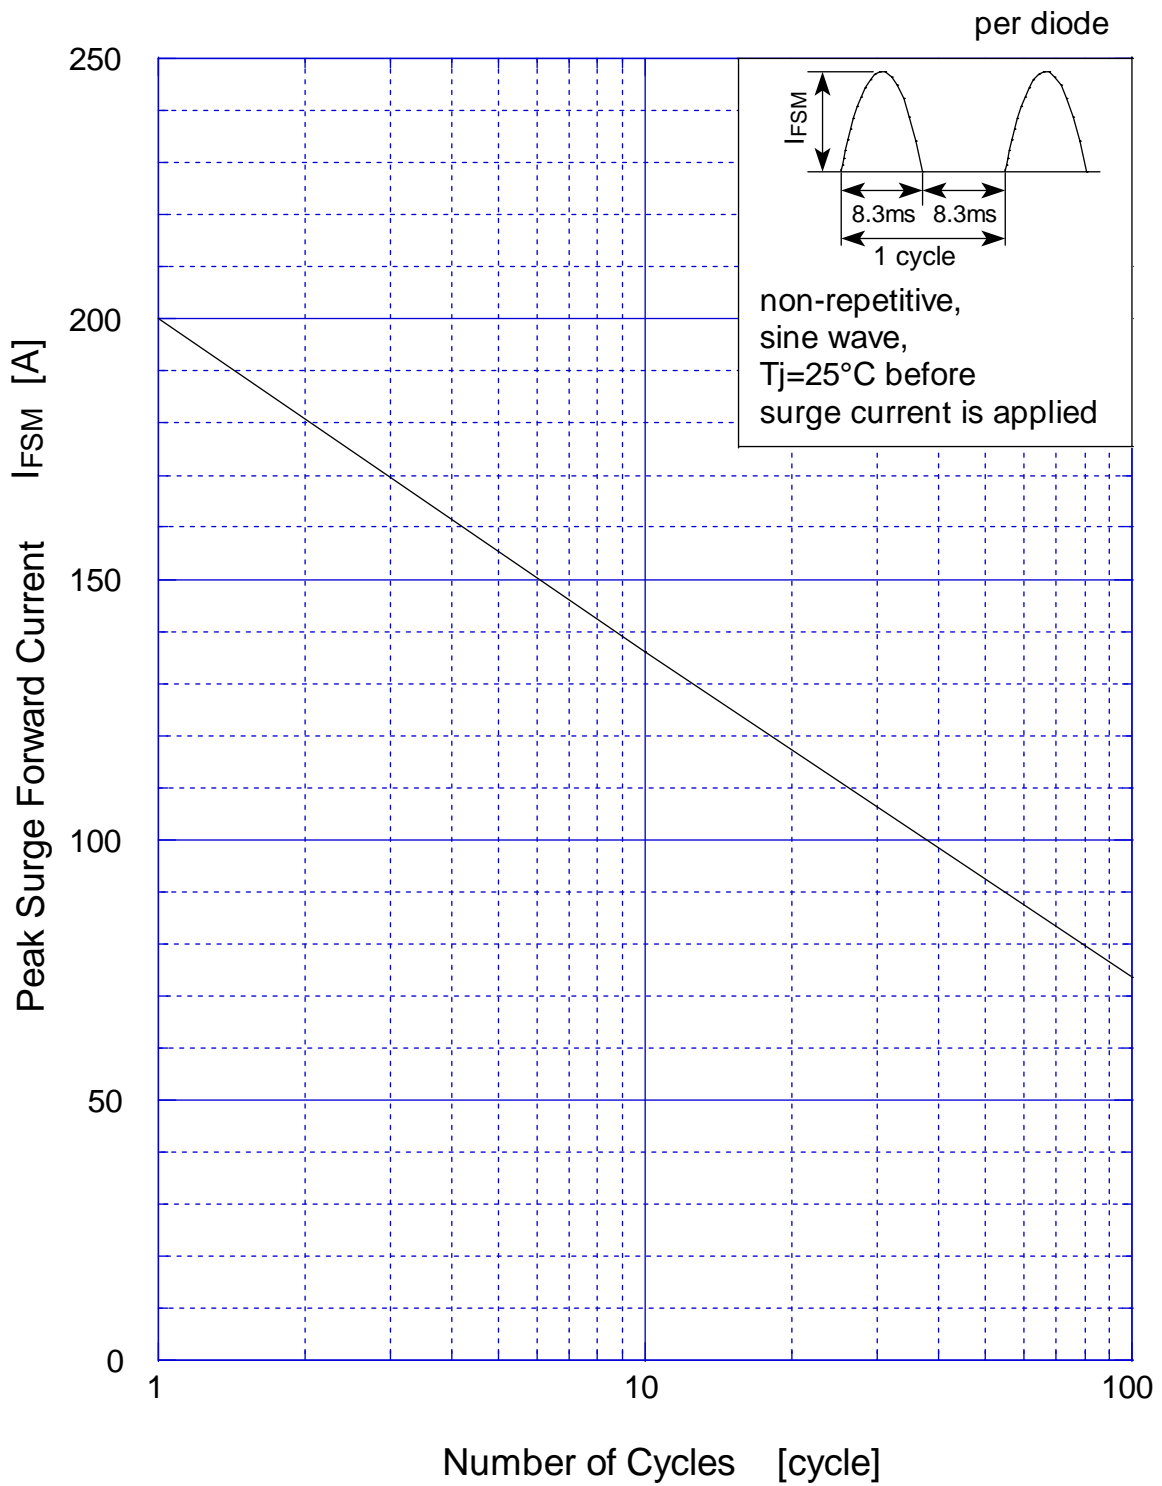

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.